

Rodless Actuator LM80-H

12 and 24 Vdc - load up to 2000 N



Standard Features and Benefits

- Rodless actuator for horizontal operation
- For use in domestic, office or medical applications
- Rigid self supporting extruded aluminum profile
- Durable and corrosion free
- Lightweight and quiet operation
- Safety nut on ball screw versions
- Easy and fast T-slot mounting
- Maintenance free

General Specifications

Parameter	LM80-H
Screw type	trapezoidal or ball
Internally restrained	yes
Manual override	no
Dynamic braking	no
Holding brake	no
End of stroke protection	spring loaded soft stop
Mid stroke protection	no
Motor protection	no
Motor connection with motor enclosure no motor enclosure	cable no cable, clips on motor
Motor connector with motor enclosure no motor enclosure	DIN 41524 8 pin plug clips on motor
Certificates	CE
Options	• no motor enclosure • manual override • alternative motor positions • stroke over 1500 mm* • encoder *

* Contact customer support

» Ordering Key - see page 70

» Glossary - see page 72

» Electric Wiring Diagram - see page 45

Performance Specifications

Parameter	LM80-H
Maximum load (Fb) [N]	2000
Maximum load torque (Mb) [Nm]	
DT••-T68M ••••• H	250
DT••-B61M ••••• H	400
DT••-B62M ••••• H	180
DT••-B65M ••••• H	750
Speed, at no load / at maximum load [mm/s]	
DT••-T68M ••••• H	44 / 37
DT••-B61M ••••• H	55 / 50
DT12 -B62M ••••• H	110 / 73
DT24 -B62M ••••• H	110 / 87
DT••-B65M ••••• H	28 / 28
Available input voltages [Vdc]	12, 24
Standard stroke lengths [mm]	500, 600, 700, 800, 900, 1000, 1100, 1200, 1300, 1400, 1500
Operating temperature limits [°C]	0 – +40
Full load duty cycle @ 20 °C [%]	15
Maximum on time [s]	120
End play, maximum [mm]	1,0
Restraining torque [Nm]	0
Lead cross section [mm²]	
with / without motor enclosure	1,5 / –
Cable length [mm]	
with / without motor enclosure	2000 / –
Protection class with / without motor enclosure	IP44 / IP33


Compatible Controls

Control model	See page
DPDT switch	48
DPDT switch box	49
DCG-170	54
AC-247 ELS	52

Rodless Actuator LM80-H

12 and 24 Vdc - load up to 2000 N

! Note: this unit may only be mounted horizontally.

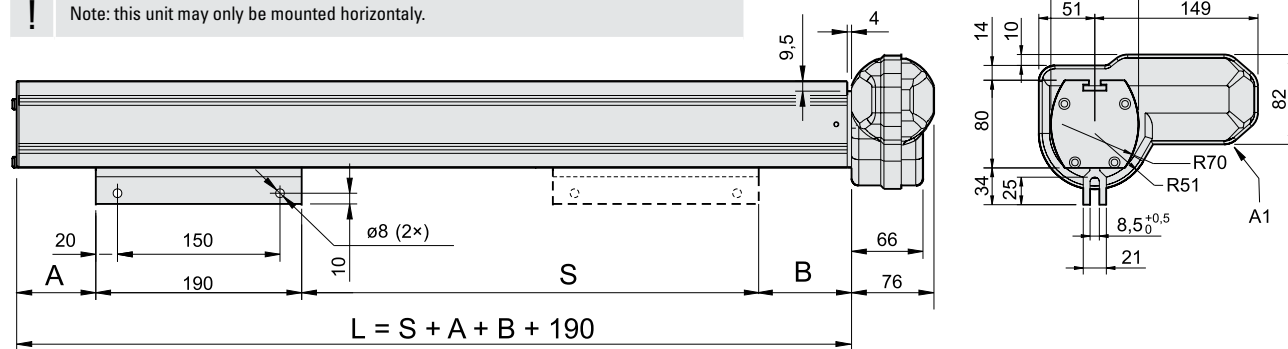

S: stroke


L: length of profile

A1: motor shown in position A (standard position)

Stroke (S)	[mm]	500	600	700	800	900	1000	1100	1200	1300	1400	1500
Dimensions (A) / (B)	[mm]											
DT••-T68M ••••• H		54,0 / 77,0										
DT••-B61M ••••• H		102,0 / 77,0										
DT••-B62M ••••• H		102,0 / 77,0										
DT••-B65M ••••• H		79,0 / 77,0										
Weight	[kg]											
DT••-T68M ••••• H		11,2	13,1	14,8	16,6	18,1	20,2	22,0	23,8	25,5	27,4	29,1
DT••-B61M ••••• H		12,1	13,9	15,7	17,5	19,3	21,0	22,9	24,6	26,3	28,2	30,0
DT••-B62M ••••• H		12,1	13,9	15,7	17,5	19,3	21,0	22,9	24,6	26,3	28,2	30,0
DT••-B65M ••••• H		11,7	13,5	15,3	17,1	18,9	20,6	22,4	24,2	26,0	27,8	29,6

Performance Diagrams


Speed and Current vs. Load

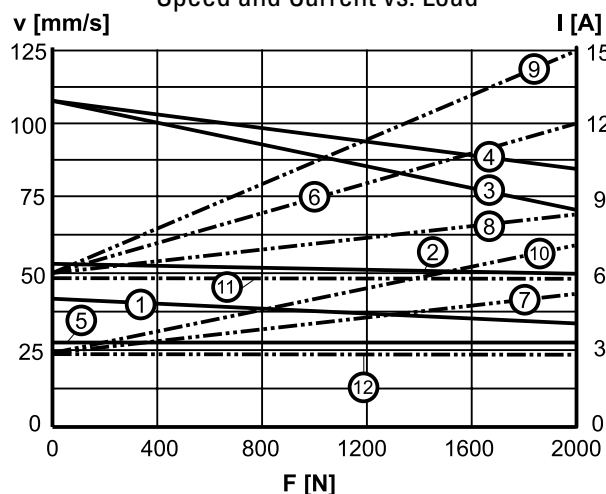



V: speed I: current F: load

- 1: speed DT••-T68M ••••• H
- 2: speed DT••-B61M ••••• H
- 3: speed DT12-B62M ••••• H
- 4: speed DT24-B62M ••••• H
- 5: speed DT••-B65M ••••• H
- 6: current DT12-T68M ••••• H
- 7: current DT24-T68M ••••• H and DT24-B61M ••••• H
- 8: current DT12-B61M ••••• H
- 9: current DT12-B62M ••••• H
- 10: current DT24-B62M ••••• H
- 11: current DT12-B65M ••••• H
- 12: current DT24-B65M ••••• H

Definition of Forces



Deflection of Profile

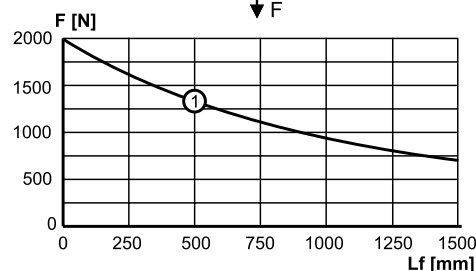

F: load L_f : distance between mounting points

1: maximum allowed deflection

Rodless Actuator LM80-V

12 and 24 Vdc - load up to 2000 N



Standard Features and Benefits

- Rodless actuator for vertical operation with motor down
- For use in domestic, office or medical applications
- Rigid self supporting extruded aluminum profile
- Durable and corrosion free
- Holding brake prevents downward motion at power off
- Lightweight and quiet operation
- Safety nut on ball screw versions
- Easy and fast T-slot mounting
- Optional spline safety function
- Maintenance free

General Specifications

Parameter	LM80-V
Screw type	trapezoidal or ball
Internally restrained	yes
Manual override	no
Dynamic braking	no
Holding brake	yes
End of stroke protection	spring loaded soft stop
Mid stroke protection	no
Motor protection	no
Motor connection with motor enclosure no motor enclosure	cable no cable, clips on motor
Motor connector with motor enclosure no motor enclosure	DIN 41524 8 pin plug clips on motor
Certificates	CE
Options	• no motor enclosure • manual override • alternative motor positions • spline safety function • stroke over 1500 mm* • encoder *

* Contact customer support

» Ordering Key - see page 70

» Glossary - see page 72

» Electric Wiring Diagram - see page 45

Performance Specifications

Parameter	LM80-V
Maximum load (Fa) [N]	
DT••-T68M ••••• V(F)	650
DT••-B61M ••••• V(F)	1000
DT••-B62M ••••• V(F)	450
DT••-B65M ••••• V(F)	2000
Maximum load torque (Ma) [Nm]	
DT••-T68M ••••• V(F)	250
DT••-B61M ••••• V(F)	400
DT••-B62M ••••• V(F)	180
DT••-B65M ••••• V(F)	750
Speed, at no load / at maximum load [mm/s]	
DT12 -T68M ••••• V(F)	44 / 29
DT24 -T68M ••••• V(F)	44 / 35
DT12 -B61M ••••• V(F)	55 / 37
DT24 -B61M ••••• V(F)	55 / 43
DT12 -B62M ••••• V(F)	110 / 67
DT24 -B62M ••••• V(F)	110 / 83
DT12 -B65M ••••• V(F)	28 / 19
DT24 -B65M ••••• V(F)	28 / 22
Available input voltages [Vdc]	12, 24
Standard stroke lengths [mm]	500, 600, 700, 800, 900, 1000, 1100, 1200, 1300, 1400, 1500
Operating temperature limits [°C]	0 – +40
Full load duty cycle @ 20 °C [%]	15
Maximum on time [s]	120
Restraining torque [Nm]	0
Lead cross section [mm ²] with / without motor enclosure	1,5 / –
Cable length [mm] with / without motor enclosure	2000 / –
Protection class with / without motor enclosure	IP44 / IP33



Compatible Controls

Control model	See page
DPDT switch	48
DPDT switch box	49
DCG-160	54
AC-247 ELS	52

Rodless Actuator LM80-V

12 and 24 Vdc - load up to 2000 N

! Note: this unit may only be mounted vertically with the motor down even if drawing shows it horizontally.

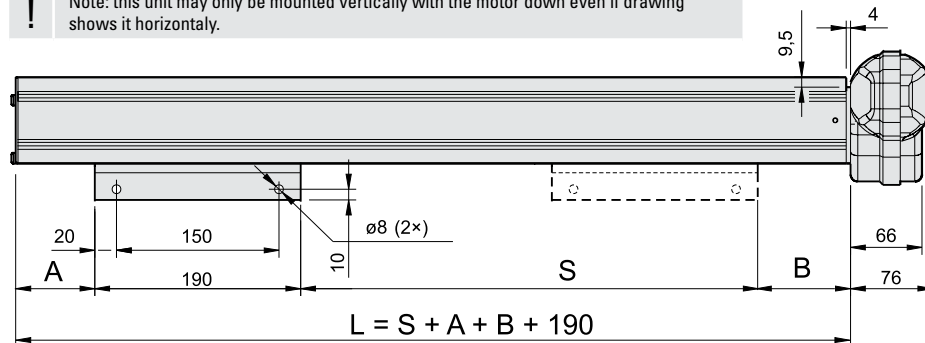

S: stroke

L: length of profile


A1: motor shown in position A (standard position)

Stroke (S)	[mm]	500	600	700	800	900	1000	1100	1200	1300	1400	1500
Dimensions (A) / (B)	[mm]											
DT••-T68M•••••V							50,0 / 71,0					
DT••-B61M•••••V							53,0 / 120,0					
DT••-B62M•••••V							53,0 / 120,0					
DT••-B65M•••••V							53,0 / 97,0					
DT••-T68M•••••F							50,0 / 90,0					
DT••-B61M•••••F							53,0 / 144,0					
DT••-B62M•••••F							53,0 / 144,0					
DT••-B65M•••••F							53,0 / 126,0					
Weight*	[kg]											
DT••-T68M•••••V		11,1	12,9	14,7	16,5	18,2	20,0	21,8	23,6	25,4	27,2	28,9
DT••-B61M•••••V		11,6	13,4	15,2	17,0	18,7	20,5	22,3	24,1	25,9	27,7	29,5
DT••-B62M•••••V		11,6	13,4	15,2	17,0	18,7	20,5	22,3	24,1	25,9	27,7	29,5
DT••-B65M•••••V		12,0	13,8	15,6	17,6	19,3	21,1	22,9	24,7	26,5	28,2	30,1

* Add 0,5 kg to the below weights to get the weights for DT••-T68M•••••F, DT••-B61M•••••F, DT••-B62M•••••F and DT••-B65M•••••F.

Performance Diagrams

Speed and Current vs. Load

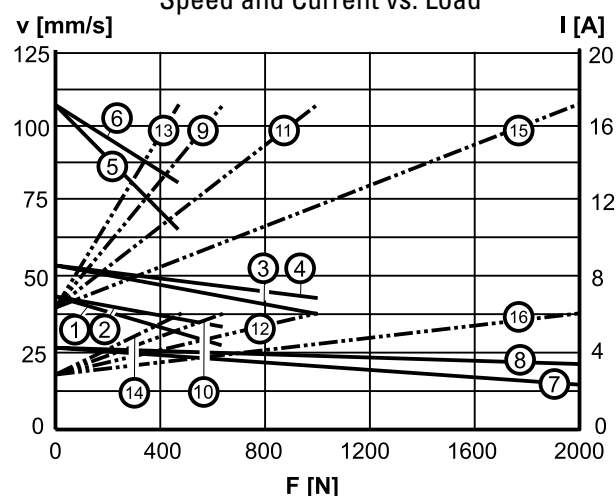


V: speed I: current F: load

- 1: speed DT12-T68M•••••V(F)
- 2: speed DT24-T68M•••••V(F)
- 3: speed DT12-B61M•••••V(F)
- 4: speed DT24-B61M•••••V(F)

- 5: speed DT12-B62M•••••V(F)
- 6: speed DT24-B62M•••••V(F)
- 7: speed DT12-B65M•••••V(F)
- 8: speed DT24-B65M•••••V(F)
- 9: current DT12-T68M•••••V(F)
- 10: current DT24-T68M•••••V(F)

- 11: current DT12-B61M•••••V(F)
- 12: current DT24-B61M•••••V(F)
- 13: current DT12-B62M•••••V(F)
- 14: current DT24-B62M•••••V(F)
- 15: current DT12-B65M•••••V(F)
- 16: current DT24-B65M•••••V(F)


Definition of Forces




Ordering Keys

Rodless Actuators

LM80-H						
1	2	3	4	5	6	7
DT24 -	B62M -	140	A	C	H	X
1. Model and input voltage DT12 - = LM80, 12 Vdc DT24 - = LM80, 24 Vdc 2. Load torque capacity and screw type T68M - = 250 Nm, trapezoidal B61M - = 400 Nm, ball B62M - = 180 Nm, ball B65M - = 750 Nm, ball		3. Stroke 050 = 500 mm 060 = 600 mm 070 = 700 mm 080 = 800 mm 090 = 900 mm 100 = 1000 mm 110 = 1100 mm 120 = 1200 mm 130 = 1300 mm 140 = 1400 mm 150 = 1500 mm		4. Motor position A = 0° (standard) B = 60° C = 120° D = 180° E = 240° F = 300° 5. Motor enclosure C = with enclosure (IP44) U = no enclosure (IP33) 6. Mounting position H = horizontal 7. Options X = no option H = manual override		



LM80-V						
1	2	3	4	5	6	7
DT24 -	B62M -	140	A	C	V	X
1. Model and input voltage DT12 - = LM80, 12 Vdc DT24 - = LM80, 24 Vdc 2. Load torque capacity and screw type T68M - = 250 Nm, trapezoidal B61M - = 400 Nm, ball B62M - = 180 Nm, ball B65M - = 750 Nm, ball		3. Stroke 050 = 500 mm 060 = 600 mm 070 = 700 mm 080 = 800 mm 090 = 900 mm 100 = 1000 mm 110 = 1100 mm 120 = 1200 mm 130 = 1300 mm 140 = 1400 mm 150 = 1500 mm		4. Motor position A = 0° (standard) B = 60° C = 120° D = 180° E = 240° F = 300° 5. Motor enclosure C = with enclosure (IP44) U = no enclosure (IP33) 6. Mounting position and spline safety function V = vertical with motor down, no spline safety function F = vertical with motor down, with spline safety function 7. Options X = no option H = manual override		





TORINO

Direzione Generale e Stabilimento di Produzione - Headquarter and Production Plant:

Via Mappano, 17 - 10071 Borgaro T.se (TO)

T +39 011 451 8611 (centr. r.a.) - F +39 011 470 4891

setec.to@setec-group.it



MILANO

Via Meccanica, 5

20026 Novate (MI) - Z. I. Vialba

T +39 02 356 0990 - 382 01 590 (r.a.)

F +39 02 356 0943

setec.mi@setec-group.it



BOLOGNA

Via Del Lavoro, 6/A

40051 Altedo (BO)

T +39 051 871 949 (3 linee r.a.)

F +39 051 870 329

setec.bo@setec-group.it



PADOVA

Via Secchi, 81

35136 Padova

T +39 049 872 5983

F +39 049 856 0965

setec.pd@setec-group.it

FIRENZE
Via Galileo Galilei, 3
50015 Bagno a Ripoli - Grassina (FI)

T +39 055 643 261

F +39 055 646 6614

setec.fi@setec-group.it

www.setec-group.it

